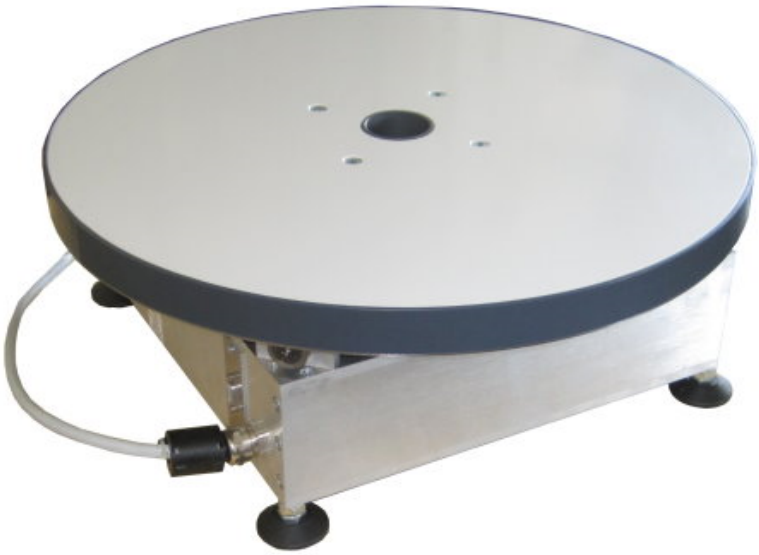


Compact Table CT0800

Diameter	800 mm
Permissible load	max. 75kg
Height	188 mm
Material carrier plate	Kömacel, PVC-border-ring, weatherproof or Wood
Min. Rotating time	0,5 rpm.
Max. Rotating time	2,0 rpm.
Positioning accuracy	+/-1°
Rotating angle	±200° or -20° to +380°
Control	fibre optic cable (POF type)
Motor	electronic EC motor 150W
Drive unit	shielded and radio interference suppressed; 20dB under CISPR 22 Class B
Temperature range	0 °C...+40 °C
Working range	5 °C...+35 °C
Current consumption	max. 1,6A
Voltage	115 / 230V (50-60Hz)

Brief description

The CT0800 is a compact and inexpensive turntable for test opjects up to 75 kg (165 lbs.). The CT0800 is dismountable and easy to transport. The options for the automatically control are the controller CO3000 or directly a PC via USB.

If ordered with PC Control, the CT0800 will be delivered with small demo software written in Visual Basic, C++ or LabView.

The **GPIB (IEEE 488) bus,** when operated with the **CO2000 Controller,** or **GPIB (IEEE 488) & LAN (TCP/IP),** when operated by CO3000 Controller provides an additional control option for all functions.